



MINISTRY OF TECHNOLOGY  
AERONAUTICAL RESEARCH COUNCIL  
CURRENT PAPERS

Normal Shock-Wave Tables for Air, Argon,  
Carbon Dioxide, Carbon Monoxide, Hydrogen,  
Nitrogen, Nitrous Oxide and Oxygen

By  
K. C. Lapworth  
*Division of Quantum Metrology, NPL*

LONDON. HER MAJESTY'S STATIONERY OFFICE

1970

PRICE 7s 0d [35p] NET



Normal Shock-Wave Tables for Air, Argon, Carbon Dioxide,  
 Carbon Monoxide, Hydrogen, Nitrogen, Nitrous  
 Oxide, and Oxygen  
 - By -  
 K. C. Lapworth,  
 Division of Quantum Metrology, NPL

List of Contents

	<u>Page</u>
1. Introduction ... ..	1
2. Calculation of Conditions behind the Incident Shock Wave ... ..	2
3. Calculation of Conditions behind the Reflected Shock Wave ... ..	3
4. Representation of the Enthalpy by Chebyshev Polynomials ... ..	3
5. Shock Tables ... ..	4
5.1 Air	
5.2 Argon	
5.3 Carbon dioxide	
5.4 Carbon monoxide	
5.5 Hydrogen	
5.6 Nitrogen	
5.7 Nitrous oxide	
5.8 Oxygen	
6. Table of Chebyshev Coefficients ... ..	6

1. Introduction

Equilibrium conditions behind the incident and reflected shock wave are evaluated using the method of Ref. 1. In this method the enthalpy of the gas is regarded as the sum of two parts: (i) the enthalpy evaluated for a gas consisting of rigid molecules having no internal excitation and (ii) a correction term to be added to (i), to take account of internal excitation. The specific enthalpy,  $h$ , is given by the following expression:

$$h = \left(1 + \frac{n}{2}\right) RT + \phi(T) \quad \dots (1)$$

where/

\*Replaces A.R.C.31 277

where  $\left(1 + \frac{n}{2}\right) RT$  is the specific enthalpy for rigid molecules of  $n$  degrees of freedom ( $n = 3, 5$  or  $6$  according as the gas particles are monatomic, linear molecules or non-linear molecules respectively).  $R$  is the gas constant per gramme. The term  $\phi(T)$  represents the contribution to the enthalpy due to internal excitation of the molecules. There is also a pressure-dependent part to the enthalpy but, under many shock-tube conditions, this is very small and is neglected here. The method of calculation is briefly outlined below.

## 2. Calculation of Conditions behind the Incident Shock Wave

From the equations of state and continuity and the equations of conservation of momentum and energy the following two equations may be derived<sup>1</sup>:

$$T_2 = \left(\frac{i}{m} - u_2\right) \frac{u_2}{R} \quad \dots (2)$$

$$u_2 = \frac{\left(1 + \frac{n}{2}\right) \frac{i}{m} - \left[ \left\{ \left(1 + \frac{n}{2}\right) \left(\frac{i}{m}\right) \right\}^2 - 2(n+1) \left\{ h_0 - \phi(T_2) \right\} \right]^{1/2}}{n+1} \quad \dots (3)$$

where  $i$ ,  $m$  and  $h_0$  are constants of the flow given by

$$i = p_1 + \rho_1 u_1^2$$

$$m = \rho_1 u_1$$

$$h_0 = h_1 + \frac{1}{2} u_1^2$$

$p_1$ ,  $\rho_1$  and  $h_1$  are the initial pressure, density and specific enthalpy and  $u_1$  is the speed of the incident shock wave.  $T_2$  is the temperature behind the incident shock and  $u_2$  is the speed of the gas downstream of the shock in a frame of reference in which the shock is stationary.

Equations (2) and (3) are simultaneous equations for  $u_2$  and  $T_2$ . As a first approximation, we put  $\phi(T_2) = 0$  in (3) (i.e. we assume no internal excitation of the molecules) and the first approximation to  $u_2$  is calculated. This is then used in (2) to derive  $T_2$ . With a knowledge of  $T_2$ ,  $\phi(T_2)$  can be determined from enthalpy tables. This new  $\phi(T_2)$  is substituted in (3) and the cycle repeated. It is found that successive solutions oscillate on either side of the true solution and convergence is greatly assisted if each new solution is taken as the arithmetic mean of the previous two solutions.

With the solutions for  $u_2$  and  $T_2$  the remaining conditions behind the incident shock wave are readily calculated.

### 3. Calculation of Conditions behind the Reflected Shock Wave

The equations of state, continuity, momentum and energy lead to the following two equations<sup>1</sup>:

$$T_3 = \left( \frac{I}{M} + u_3 \right) \frac{U u_3}{R(u_3 + U)} \quad \dots (4)$$

$$u_3 = -\frac{1}{n} \left\{ \left( 1 + \frac{n}{2} \right) \frac{I}{M} - U - \frac{H_0 - \phi(T_3)}{U} \right\} + \frac{1}{n} \left[ \left\{ \left( 1 + \frac{n}{2} \right) \frac{I}{M} - U - \frac{H_0 - \phi(T_3)}{U} \right\}^2 + 2n \left\{ H_0 - \phi(T_3) \right\} \right]^{1/2} \quad \dots (5)$$

where

$$U = u_1 - u_2$$

$$I = p_2 + \rho_2 U^2$$

$$M = \rho_2 U$$

$$H_0 = h_2 + \frac{1}{2} U^2$$

all of which are known since conditions 2 are obtained from the solutions of the equations for the incident shock wave.  $u_3$  is the speed of the reflected shock wave and  $T_3$  is the temperature behind the reflected shock.

The calculation proceeds as for the incident shock wave: a first approximation to  $u_3$  is found by putting  $\phi(T_3) = 0$  and this is used as the starting point for the iteration.

The calculations were carried out for equal intervals of 0.1 in incident shock Mach number and the range of shock speed was adjusted for each gas so that the complete range of tabulated enthalpy was covered.

It was found convenient for the computer calculation to represent the enthalpy of each gas by a sum of Chebyshev polynomials as outlined in Section 4 below.

The results of these calculations are given in Tables 5.1-5.8.

### 4. Representation of the Enthalpy of Chebyshev Polynomials

The tables of Hilsenrath et al<sup>2</sup> were used to provide enthalpy data for air, argon, carbon dioxide, carbon monoxide, hydrogen, nitrogen and oxygen. The tables of McBride et al<sup>4</sup> provided enthalpy data for nitrous oxide. All the data used are for ideal gases in which no account is taken of the dependence of enthalpy on pressure and the effects of dissociation and ionisation are neglected.

The enthalpy data for each gas are fitted by a polynomial, which is a "best fit" in the least squares sense, of the form:

$$h = \frac{1}{2} C_0 + C_1 \chi_1(x_r) + C_2 \chi_2(x_r) + \dots + C_k \chi_k(x_r) + \dots + C_j \chi_j(x_r) \dots (6)$$

where  $j$  is the degree of the polynomial and  $C_k$  is the  $k$ th Chebyshev coefficient of the Chebyshev polynomial  $\chi_k(x_r)$ ,  $h$  is the enthalpy and  $x_r$  is given by

$$\left. \begin{aligned} x_r &= \lambda \theta_r + \mu \\ \lambda &= \frac{2}{\theta_m - \theta_1} \\ \mu &= -\frac{\theta_m + \theta_1}{\theta_m - \theta_1} \end{aligned} \right\} \dots (7)$$

where  $\theta_r$  is the temperature corresponding to the  $r$ th entry in the enthalpy table and  $r = 1, 2, \dots, m$ .  $\theta_r$  is in ascending order of magnitude.

A computer programme, based on the method of Davis and Robertson<sup>4</sup> was used to evaluate the Chebyshev coefficients for the various sets of enthalpy data. The number of terms in (6) was chosen to be sufficient to fit the tabulated enthalpy data to better than 3 significant figures over the whole range of temperature. The Chebyshev coefficients for the various gases are given in Table 6.

## 5. Shock Tables


### Nomenclature

M	=	Mach number of incident shock wave based on the speed of sound ahead of the shock.
U1	=	Speed of incident shock wave in cms per second.
P21	=	Pressure ratio across incident shock wave.
R21	=	Density ratio across incident shock wave.
T2	=	Temperature behind incident shock wave in degrees Kelvin. (In all cases, the temperature $T_1$ ahead of the shock is 293°K).
U2	=	Speed of gas behind incident shock in cms per second.
P31	=	Pressure ratio across the reflected shock wave.
R31	=	Density ratio across the reflected shock wave.
T3	=	Temperature behind the reflected shock wave in degrees Kelvin.
U3	=	Speed of reflected shock wave in cms per second.

The results for the various gases are given in Tables 5.1-5.8.

The tables do not take into account the effects of dissociation since they rely on enthalpy data in which dissociation was ignored. Therefore, the tables must be used with caution at high temperatures and low pressures. Fig. 1 shows boundaries for 6 of the 8 gases in the p,T plane along which there is 1 per cent increase in compressibility due to dissociation (and chemical reaction in the case of air). These boundaries were calculated using the "JANAF Thermochemical Data"<sup>5</sup>. Moving to the left and upwards from the boundary for any gas the tables can be used with increasing confidence; moving to the right and downwards from a boundary the tables become less accurate.

A boundary for argon does not appear in the p,T plane as nowhere within the bounds of the plane shown does it achieve 1 per cent ionisation. Nitrous oxide (N<sub>2</sub>O) is omitted too since the reaction



is exothermic and a boundary does not exist in the p,T plane.

No account has been taken of relaxation time. In regions behind shock waves where there is full equilibrium of internal excitation but before there is appreciable dissociation or chemical reaction, the tables will be accurate.

Tables 5.1-5.8/

6. Table of Chebyshev Coefficients

The coefficients in Table 6 may be used to derive enthalpy over the specified temperature range by use of equation (6). The enthalpy generated is in the dimensionless form  $H/RT_0$  where  $R$  is the gas constant and  $T_0 = 273.16^\circ\text{K}$ . The temperature, in degrees Kelvin, must be transformed according to equation (7).

---



References

<u>No.</u>	<u>Author(s)</u>	<u>Title, etc.</u>
1	K. C. Lapworth	A simple method for calculation of conditions behind shock waves. J.Phys.A (Gen. Phys.), 1969, Ser.2, Vol.2. Letters to the Editor, p.735.
2	J. Hilsenrath et al.	Tables of thermodynamic and transport properties of air, argon, carbon dioxide, carbon monoxide, hydrogen, nitrogen, oxygen and steam. Pergamon Press, 1960.
3	B. J. McBride et al.	Thermodynamic properties to 6000°K for 210 substances involving the first 18 elements. NASA SP-3001, 1963.
4	J. D. Davis and H. H. Robertson	Programme-550, Curve Fitting. Mercury Auto-Code Library Specification. Computer Section, Central Instrument Laboratory, I.C.I. Limited, Wilton.
5		JANAF Thermochemical Data. The Dow Chemical Company, Midland, Michigan.

Table 6

Gas	Temperature Range	Chebyshev Coefficients
Air	250 - 3000°K	$C_0 = 4.68677807, +1$ $C_1 = 2.10226383, +1$ $C_2 = 6.47638388, -1$ $C_3 = -1.35679492, -1$ $C_4 = 1.70648402, -2$ $C_5 = 7.83222069, -3$ $C_6 = -7.67614091, -3$ $C_7 = 3.58417033, -3$ $C_8 = -9.89829902, -4$ $C_9 = 5.99110415, -6$ $C_{10} = 2.08067305, -4$
Argon	250 - 5000°K	$C_0 = 4.80487646, +1$ $C_1 = 2.17363437, +1$
Carbon Dioxide	250 - 5000°K	$C_0 = 1.25746776, +2$ $C_1 = 6.27763909, +1$ $C_2 = 1.96793967, +0$ $C_3 = -7.62005141, -1$ $C_4 = 3.31053452, -1$ $C_5 = -1.31419391, -1$ $C_6 = 4.77501858, -2$ $C_7 = -1.56437941, -2$ $C_8 = 4.61895414, -3$ $C_9 = -1.39852246, -3$ $C_{10} = 6.40561648, -4$ $C_{11} = -4.21105504, -4$ $C_{12} = 1.91901735, -4$
Carbon Monoxide	250 - 5000°K	$C_0 = 7.93788901, +1$ $C_1 = 3.78265814, +1$ $C_2 = 9.14801170, -1$ $C_3 = -3.18792491, -1$ $C_4 = 1.07762824, -1$ $C_5 = -2.25687609, -2$ $C_6 = -4.74870239, -3$ $C_7 = 9.10501648, -3$ $C_8 = -6.98797773, -3$ $C_9 = 3.67347931, -3$ $C_{10} = -1.79443795, -3$

Table 6 (contd.)

Table 6 (Contd.)

Gas	Temperature Range	Chebyshev Coefficients
Hydrogen	250 - 5000°K	$C_0 = 7.69316603, +1$ $C_1 = 3.71667578, +1$ $C_2 = 1.71605946, +0$ $C_3 = -1.70349186, -1$ $C_4 = -1.90907122, -2$ $C_5 = 3.63587547, -2$ $C_6 = -1.70183463, -2$ $C_7 = 2.50764223, -3$ $C_8 = 3.74125707, -3$ $C_9 = -3.70886691, -3$ $C_{10} = 1.60824431, -3$ $C_{11} = -9.08727266, -4$ $C_{12} = 6.05646460, -4$
Nitrogen	250 - 5000°K	$C_0 = 7.88164660, +1$ $C_1 = 3.75698741, +1$ $C_2 = 9.58209877, -1$ $C_3 = -3.23315411, -1$ $C_4 = 9.79042425, -2$ $C_5 = -1.36442033, -2$ $C_6 = -9.61825963, -3$ $C_7 = 1.11124251, -2$ $C_8 = -7.14712647, -3$ $C_9 = 3.37438633, -3$ $C_{10} = -1.17595304, -3$
Nitrous Oxide	100 - 6000°K	$C_0 = 1.53631304, +2$ $C_1 = 8.06172075, +1$ $C_2 = 3.09618315, +0$ $C_3 = -1.01421975, +0$ $C_4 = 5.47298192, -1$ $C_5 = -2.52710661, -1$ $C_6 = 1.08582218, -1$ $C_7 = -4.27628604, -2$ $C_8 = 1.52831142, -2$ $C_9 = -4.98668045, -3$ $C_{10} = 1.54193724, -3$ $C_{11} = -5.01327698, -4$ $C_{12} = 1.37830560, -4$

Table 6 (Contd.)/

Table 6 (Contd.)

Gas	Temperature Range	Chebyshev Coefficients
Oxygen	250 - 5000°K	$C_0 = 8.37078463, +1$ $C_1 = 4.04393305, +1$ $C_2 = 1.42092080, +0$ $C_3 = -2.41145725, -1$ $C_4 = 6.80734190, -2$ $C_5 = -4.47649273, -2$ $C_6 = 2.01324076, -2$ $C_7 = -3.29978871, -3$ $C_8 = -3.12089396, -3$ $C_9 = 3.58014684, -3$ $C_{10} = -2.50900883, -3$ $C_{11} = 1.35522549, -3$ $C_{12} = -6.71371962, -4$

---

Acknowledgements

The author is grateful to Dr. D. Schofield for the curve-fitting programme used to determine the best-fit curve to the enthalpy data. Mr. J. Pendlebury and Mr. L. A. Allnut prepared many of the data and programme tapes for the computer.

---

AIR

T1 293.0

Table 5.1

INCIDENT SHOCK

REFLECTED SHOCK

M	U1	P21	R21	T2	U2	P31	R31	T3	U3
1.10	3.779, +4	1.25	1.17	312	5.525, +3	1.55	1.37	332	3.334, +4
1.20	4.122, +4	1.52	1.34	331	1.056, +4	2.25	1.78	370	3.272, +4
1.30	4.466, +4	1.81	1.52	349	1.526, +4	3.12	2.23	409	3.237, +4
1.40	4.809, +4	2.13	1.69	368	1.970, +4	4.19	2.73	449	3.221, +4
1.50	5.153, +4	2.47	1.87	387	2.393, +4	5.45	3.25	491	3.221, +4
1.60	5.496, +4	2.83	2.04	407	2.800, +4	6.92	3.80	533	3.231, +4
1.70	5.840, +4	3.22	2.21	427	3.193, +4	8.61	4.37	577	3.251, +4
1.80	6.183, +4	3.63	2.37	448	3.574, +4	10.53	4.95	623	3.278, +4
1.90	6.527, +4	4.06	2.53	471	3.947, +4	12.68	5.55	670	3.311, +4
2.00	6.870, +4	4.52	2.68	494	4.311, +4	15.06	6.14	719	3.348, +4
2.10	7.214, +4	5.00	2.83	517	4.669, +4	17.68	6.74	769	3.389, +4
2.20	7.557, +4	5.51	2.98	542	5.021, +4	20.55	7.34	821	3.422, +4
2.30	7.901, +4	6.04	3.12	568	5.368, +4	23.66	7.93	874	3.479, +4
2.40	8.244, +4	6.60	3.25	594	5.711, +4	27.02	8.53	929	3.527, +4
2.50	8.588, +4	7.18	3.39	621	6.051, +4	30.63	9.11	985	3.577, +4
2.60	8.931, +4	7.78	3.51	650	6.387, +4	34.49	9.69	1042	3.627, +4
2.70	9.275, +4	8.41	3.63	679	6.721, +4	38.61	10.27	1102	3.679, +4
2.80	9.618, +4	9.07	3.75	708	7.053, +4	42.99	10.83	1163	3.733, +4
2.90	9.962, +4	9.75	3.86	739	7.383, +4	47.64	11.39	1225	3.788, +4
3.00	1.031, +5	10.45	3.97	771	7.710, +4	52.51	11.93	1289	3.845, +4
3.10	1.065, +5	11.18	4.08	803	8.036, +4	57.68	12.47	1355	3.902, +4
3.20	1.099, +5	11.93	4.18	836	8.362, +4	63.12	13.00	1423	3.960, +4
3.30	1.134, +5	12.71	4.28	870	8.686, +4	68.84	13.52	1492	4.019, +4
3.40	1.168, +5	13.51	4.37	905	9.007, +4	74.78	14.02	1562	4.079, +4
3.50	1.202, +5	14.34	4.46	941	9.329, +4	81.03	14.52	1635	4.140, +4
3.60	1.237, +5	15.19	4.55	977	9.650, +4	87.57	15.01	1709	4.201, +4
3.70	1.271, +5	16.07	4.64	1015	9.971, +4	94.38	15.49	1785	4.263, +4
3.80	1.305, +5	16.97	4.72	1053	1.029, +5	101.47	15.97	1862	4.325, +4
3.90	1.340, +5	17.90	4.81	1091	1.061, +5	108.84	16.43	1941	4.388, +4
4.00	1.374, +5	18.85	4.88	1131	1.093, +5	116.44	16.87	2023	4.453, +4
4.10	1.408, +5	19.83	4.96	1171	1.124, +5	124.36	17.31	2104	4.515, +4
4.20	1.443, +5	20.83	5.04	1212	1.156, +5	132.57	17.75	2189	4.580, +4
4.30	1.477, +5	21.86	5.11	1254	1.188, +5	141.07	18.17	2275	4.645, +4
4.40	1.511, +5	22.92	5.18	1297	1.220, +5	149.85	18.58	2363	4.710, +4
4.50	1.546, +5	24.00	5.25	1340	1.251, +5	158.91	18.99	2452	4.776, +4
4.60	1.580, +5	25.10	5.31	1384	1.283, +5	168.27	19.38	2543	4.842, +4
4.70	1.614, +5	26.23	5.38	1429	1.314, +5	177.90	19.77	2636	4.909, +4
4.80	1.649, +5	27.38	5.44	1475	1.346, +5	187.82	20.15	2731	4.975, +4
4.90	1.683, +5	28.56	5.50	1522	1.377, +5	198.03	20.52	2827	5.043, +4
5.00	1.718, +5	29.77	5.56	1569	1.409, +5	208.53	20.89	2925	5.110, +4
5.10	1.752, +5	31.00	5.62	1617	1.440, +5				
5.20	1.786, +5	32.25	5.67	1666	1.471, +5				
5.30	1.821, +5	33.53	5.73	1715	1.503, +5				
5.40	1.855, +5	34.84	5.78	1766	1.534, +5				
5.50	1.889, +5	36.16	5.83	1817	1.565, +5				
5.60	1.924, +5	37.52	5.88	1869	1.596, +5				
5.70	1.958, +5	38.90	5.93	1922	1.628, +5				
5.80	1.992, +5	40.30	5.98	1976	1.659, +5				
5.90	2.027, +5	41.73	6.02	2030	1.690, +5				
6.00	2.061, +5	43.19	6.07	2085	1.721, +5				
6.10	2.095, +5	44.67	6.11	2141	1.753, +5				
6.20	2.130, +5	46.17	6.16	2198	1.784, +5				

AIR

TI 293.0

INCIDENT SHOCK

M	U1	P21	R21	T2	U2
6.30	2.164, +5	47.70	6.20	2255	1.815, +5
6.40	2.198, +5	49.26	6.24	2314	1.846, +5
6.50	2.233, +5	50.84	6.28	2373	1.877, +5
6.60	2.267, +5	52.44	6.32	2432	1.908, +5
6.70	2.301, +5	54.07	6.36	2493	1.939, +5
6.80	2.336, +5	55.73	6.39	2554	1.970, +5
6.90	2.370, +5	57.41	6.43	2617	2.001, +5
7.00	2.405, +5	59.11	6.46	2680	2.032, +5
7.10	2.439, +5	60.85	6.50	2743	2.064, +5
7.20	2.473, +5	62.60	6.53	2808	2.095, +5
7.30	2.508, +5	64.38	6.57	2873	2.126, +5
7.40	2.542, +5	66.19	6.60	2940	2.157, +5

ARGON

T1 297.0

Table 5.2

INCIDENT SHOCK					REFLECTED SHOCK				
M	U1	P21	R21	T2	U2	P31	R31	T3	U3
1.10	3.517, +4	1.27	1.15	323	4.696, +3	1.60	1.32	354	3.204, +4
1.20	3.836, +4	1.56	1.30	351	8.901, +3	2.35	1.66	414	3.243, +4
1.30	4.156, +4	1.87	1.45	380	1.283, +4	3.27	2.01	477	3.301, +4
1.40	4.476, +4	2.21	1.59	409	1.653, +4	4.37	2.36	542	3.373, +4
1.50	4.795, +4	2.58	1.72	439	2.007, +4	5.67	2.72	611	3.458, +4
1.60	5.115, +4	2.97	1.85	471	2.346, +4	7.16	3.07	684	3.551, +4
1.70	5.435, +4	3.38	1.97	504	2.673, +4	8.84	3.41	760	3.653, +4
1.80	5.754, +4	3.82	2.08	538	2.991, +4	10.72	3.74	840	3.760, +4
1.90	6.074, +4	4.29	2.19	574	3.301, +4	12.79	4.06	924	3.874, +4
2.00	6.394, +4	4.78	2.29	611	3.603, +4	15.06	4.36	1012	3.992, +4
2.10	6.714, +4	5.29	2.39	650	3.900, +4	17.52	4.65	1104	4.114, +4
2.20	7.033, +4	5.83	2.47	691	4.191, +4	20.17	4.92	1201	4.239, +4
2.30	7.353, +4	6.40	2.56	733	4.478, +4	23.01	5.18	1302	4.368, +4
2.40	7.673, +4	6.99	2.64	777	4.761, +4	26.04	5.42	1407	4.499, +4
2.50	7.992, +4	7.61	2.71	823	5.040, +4	29.25	5.65	1516	4.632, +4
2.60	8.312, +4	8.25	2.76	871	5.317, +4	32.64	5.87	1629	4.767, +4
2.70	8.632, +4	8.91	2.84	920	5.591, +4	36.22	6.07	1747	4.905, +4
2.80	8.951, +4	9.60	2.90	971	5.862, +4	39.97	6.26	1869	5.043, +4
2.90	9.271, +4	10.32	2.95	1024	6.131, +4	43.90	6.44	1996	5.184, +4
3.00	9.591, +4	11.06	3.00	1079	6.398, +4	48.01	6.61	2127	5.325, +4
3.10	9.911, +4	11.83	3.05	1135	6.664, +4	52.29	6.77	2262	5.468, +4
3.20	1.023, +5	12.62	3.10	1194	6.927, +4	56.74	6.92	2402	5.612, +4
3.30	1.055, +5	13.44	3.14	1254	7.190, +4	61.36	7.06	2546	5.757, +4
3.40	1.087, +5	14.28	3.18	1316	7.451, +4	66.15	7.19	2694	5.902, +4
3.50	1.119, +5	15.15	3.22	1380	7.711, +4	71.10	7.32	2847	6.049, +4
3.60	1.151, +5	16.04	3.25	1445	7.969, +4	76.22	7.43	3004	6.196, +4
3.70	1.183, +5	16.96	3.28	1513	8.227, +4	81.51	7.54	3166	6.344, +4
3.80	1.215, +5	17.90	3.32	1582	8.484, +4	86.96	7.65	3332	6.493, +4
3.90	1.247, +5	18.87	3.34	1653	8.740, +4	92.57	7.74	3502	6.642, +4
4.00	1.279, +5	19.86	3.37	1726	8.995, +4	98.35	7.84	3677	6.791, +4
4.10	1.311, +5	20.88	3.40	1801	9.249, +4	104.29	7.92	3856	6.941, +4
4.20	1.343, +5	21.92	3.42	1877	9.503, +4	110.38	8.01	4040	7.092, +4
4.30	1.375, +5	22.99	3.44	1956	9.756, +4	116.64	8.08	4228	7.243, +4
4.40	1.407, +5	24.08	3.47	2036	1.001, +5	123.06	8.16	4420	7.395, +4
4.50	1.439, +5	25.20	3.49	2118	1.026, +5	129.63	8.23	4617	7.546, +4
4.60	1.471, +5	26.35	3.51	2202	1.051, +5	136.37	8.29	4818	7.699, +4
4.70	1.503, +5	27.51	3.52	2288	1.076, +5				
4.80	1.535, +5	28.71	3.54	2375	1.101, +5				
4.90	1.567, +5	29.93	3.56	2465	1.126, +5				
5.00	1.598, +5	31.17	3.57	2556	1.151, +5				
5.10	1.630, +5	32.44	3.59	2649	1.176, +5				
5.20	1.662, +5	33.74	3.60	2744	1.201, +5				
5.30	1.694, +5	35.06	3.62	2841	1.226, +5				
5.40	1.726, +5	36.40	3.63	2939	1.251, +5				
5.50	1.758, +5	37.77	3.64	3040	1.275, +5				
5.60	1.790, +5	39.16	3.65	3142	1.300, +5				
5.70	1.822, +5	40.59	3.66	3246	1.325, +5				
5.80	1.854, +5	42.03	3.67	3352	1.350, +5				
5.90	1.886, +5	43.50	3.68	3460	1.374, +5				
6.00	1.918, +5	45.00	3.69	3569	1.399, +5				
6.10	1.950, +5	46.52	3.70	3681	1.424, +5				
6.20	1.982, +5	48.06	3.71	3794	1.448, +5				

ARGON

T1 293.0

INCIDENT SHOCK

M	U1	P21	R21	T2	U2
6.30	2.014, +5	49.63	3.72	3909	1.473, +5
6.40	2.046, +5	51.23	3.73	4026	1.497, +5
6.50	2.078, +5	52.85	3.74	4145	1.522, +5
6.60	2.110, +5	54.50	3.74	4265	1.546, +5
6.70	2.142, +5	56.17	3.75	4388	1.571, +5
6.80	2.174, +5	57.87	3.76	4512	1.595, +5
6.90	2.206, +5	59.59	3.76	4638	1.620, +5
7.00	2.238, +5	61.34	3.77	4766	1.644, +5
7.10	2.270, +5	63.11	3.78	4896	1.669, +5



CARBON DIOXIDE

T1 293.0

Table 5 3

INCIDENT SHOCK

REFLECTED SHOCK

M	U1	P21	P21	T2	U2	P31	R31	T3	U3
1.10	2.944, +4	1.24	1.18	308	4.560, +3	1.53	1.40	322	2.544, +4
1.20	3.212, +4	1.51	1.37	321	8.754, +3	2.23	1.87	350	2.446, +4
1.30	3.479, +4	1.79	1.57	335	1.263, +4	3.10	2.41	377	2.370, +4
1.40	3.747, +4	2.10	1.77	348	1.631, +4	4.16	3.02	404	2.311, +4
1.50	4.015, +4	2.44	1.98	362	1.982, +4	5.44	3.70	431	2.265, +4
1.60	4.282, +4	2.79	2.18	375	2.320, +4	6.95	4.45	458	2.231, +4
1.70	4.550, +4	3.17	2.39	389	2.645, +4	8.71	5.26	486	2.204, +4
1.80	4.817, +4	3.58	2.60	404	2.962, +4	10.73	6.12	514	2.185, +4
1.90	5.085, +4	4.01	2.80	419	3.272, +4	13.03	7.03	543	2.172, +4
2.00	5.353, +4	4.46	3.01	434	3.575, +4	15.62	7.99	573	2.163, +4
2.10	5.620, +4	4.93	3.22	449	3.873, +4	18.50	8.99	603	2.158, +4
2.20	5.888, +4	5.43	3.42	465	4.166, +4	21.70	10.02	635	2.157, +4
2.30	6.156, +4	5.95	3.62	482	4.455, +4	25.22	11.09	666	2.159, +4
2.40	6.423, +4	6.50	3.82	499	4.740, +4	29.07	12.18	699	2.164, +4
2.50	6.691, +4	7.07	4.01	517	5.023, +4	33.26	13.30	733	2.170, +4
2.60	6.958, +4	7.67	4.20	534	5.303, +4	37.79	14.43	767	2.179, +4
2.70	7.226, +4	8.29	4.39	553	5.581, +4	42.68	15.59	802	2.189, +4
2.80	7.494, +4	8.93	4.58	572	5.856, +4	47.94	16.75	838	2.201, +4
2.90	7.761, +4	9.60	4.76	591	6.130, +4	53.56	17.93	875	2.214, +4
3.00	8.029, +4	10.29	4.94	611	6.402, +4	59.56	19.12	913	2.228, +4
3.10	8.297, +4	11.00	5.11	631	6.673, +4	65.94	20.31	951	2.243, +4
3.20	8.564, +4	11.74	5.28	651	6.943, +4	72.71	21.51	990	2.260, +4
3.30	8.832, +4	12.51	5.45	672	7.211, +4	79.87	22.71	1031	2.277, +4
3.40	9.100, +4	13.29	5.61	694	7.479, +4	87.44	23.92	1071	2.294, +4
3.50	9.367, +4	14.11	5.78	716	7.745, +4	95.40	25.11	1113	2.313, +4
3.60	9.635, +4	14.94	5.93	738	8.011, +4	103.77	26.31	1156	2.333, +4
3.70	9.902, +4	15.81	6.09	761	8.276, +4	112.55	27.50	1199	2.353, +4
3.80	1.017, +5	16.69	6.24	784	8.540, +4	121.74	28.68	1244	2.374, +4
3.90	1.044, +5	17.60	6.39	807	8.803, +4	131.35	29.86	1289	2.395, +4
4.00	1.071, +5	18.53	6.53	831	9.066, +4	141.39	31.03	1335	2.417, +4
4.10	1.097, +5	19.49	6.67	856	9.329, +4	151.85	32.19	1382	2.440, +4
4.20	1.124, +5	20.48	6.81	881	9.591, +4	162.74	33.34	1430	2.463, +4
4.30	1.151, +5	21.48	6.95	906	9.852, +4	174.06	34.48	1479	2.486, +4
4.40	1.178, +5	22.51	7.08	932	1.011, +5	185.82	35.61	1529	2.510, +4
4.50	1.204, +5	23.57	7.21	958	1.037, +5	198.01	36.73	1579	2.534, +4
4.60	1.231, +5	24.65	7.34	984	1.063, +5	210.64	37.84	1631	2.558, +4
4.70	1.258, +5	25.76	7.46	1011	1.089, +5	223.71	38.94	1683	2.583, +4
4.80	1.285, +5	26.88	7.59	1038	1.115, +5	237.22	40.02	1737	2.609, +4
4.90	1.311, +5	28.04	7.71	1066	1.141, +5	251.18	41.09	1791	2.634, +4
5.00	1.338, +5	29.22	7.82	1094	1.167, +5	265.59	42.14	1847	2.660, +4
5.10	1.365, +5	30.42	7.94	1123	1.193, +5	280.44	43.18	1903	2.686, +4
5.20	1.392, +5	31.64	8.05	1152	1.219, +5	295.74	44.21	1960	2.713, +4
5.30	1.418, +5	32.89	8.16	1181	1.245, +5	311.50	45.23	2018	2.740, +4
5.40	1.445, +5	34.17	8.27	1211	1.270, +5	327.70	46.23	2077	2.767, +4
5.50	1.472, +5	35.47	8.37	1241	1.296, +5	344.35	47.21	2137	2.794, +4
5.60	1.499, +5	36.79	8.48	1272	1.322, +5	361.46	48.20	2197	2.821, +4
5.70	1.526, +5	38.14	8.58	1303	1.348, +5	379.02	49.15	2259	2.849, +4
5.80	1.552, +5	39.51	8.68	1335	1.373, +5	397.01	50.10	2322	2.876, +4
5.90	1.579, +5	40.91	8.77	1366	1.399, +5	415.48	51.03	2386	2.904, +4
6.00	1.606, +5	42.33	8.87	1399	1.425, +5	434.39	51.94	2450	2.932, +4
6.10	1.633, +5	43.78	8.96	1432	1.450, +5	453.76	52.84	2516	2.961, +4
6.20	1.659, +5	45.25	9.05	1465	1.476, +5	473.59	53.73	2583	2.990, +4

## CARRON DIOXIDE

T1 293.0

## INCIDENT SHOCK

## REFLECTED SHOCK

M	U1	P21	R21	T2	U2	P31	R31	T3	U3
6.30	1.686, +5	46.74	9.14	1499	1.502, +5	493.87	54.60	2650	3.019, +4
6.40	1.713, +5	48.26	9.23	1533	1.527, +5	514.60	55.46	2719	3.048, +4
6.50	1.740, +5	49.80	9.31	1567	1.553, +5	535.79	56.30	2788	3.077, +4
6.60	1.766, +5	51.37	9.39	1602	1.578, +5	557.42	57.13	2859	3.106, +4
6.70	1.793, +5	52.96	9.48	1637	1.604, +5	579.51	57.95	2930	3.136, +4
6.80	1.820, +5	54.58	9.56	1673	1.629, +5	602.04	58.76	3002	3.165, +4
6.90	1.847, +5	56.22	9.64	1709	1.655, +5	625.05	59.54	3076	3.195, +4
7.00	1.873, +5	57.88	9.71	1746	1.681, +5	648.50	60.32	3150	3.225, +4
7.10	1.900, +5	59.57	9.79	1783	1.706, +5	672.40	61.08	3226	3.255, +4
7.20	1.927, +5	61.28	9.86	1821	1.732, +5	696.75	61.83	3302	3.285, +4
7.30	1.954, +5	63.02	9.93	1859	1.757, +5	721.54	62.57	3379	3.316, +4
7.40	1.980, +5	64.78	10.00	1897	1.783, +5	746.79	63.30	3457	3.346, +4
7.50	2.007, +5	66.56	10.07	1936	1.808, +5	772.49	64.01	3536	3.376, +4
7.60	2.034, +5	68.37	10.14	1976	1.833, +5	798.63	64.71	3616	3.407, +4
7.70	2.061, +5	70.21	10.21	2015	1.859, +5	825.23	65.40	3697	3.438, +4
7.80	2.088, +5	72.07	10.27	2056	1.884, +5	852.26	66.08	3779	3.468, +4
7.90	2.114, +5	73.95	10.34	2096	1.910, +5	879.75	66.75	3862	3.499, +4
8.00	2.141, +5	75.85	10.40	2137	1.935, +5	907.68	67.41	3946	3.530, +4
8.10	2.168, +5	77.79	10.46	2179	1.961, +5	936.06	68.05	4030	3.561, +4
8.20	2.195, +5	79.74	10.52	2221	1.986, +5	964.88	68.69	4116	3.592, +4
8.30	2.221, +5	81.72	10.58	2263	2.011, +5	994.15	69.31	4203	3.623, +4
8.40	2.248, +5	83.72	10.64	2306	2.037, +5	1023.86	69.92	4290	3.654, +4
8.50	2.275, +5	85.75	10.69	2350	2.062, +5	1054.02	70.53	4379	3.685, +4
8.60	2.302, +5	87.80	10.75	2394	2.088, +5	1084.62	71.12	4468	3.716, +4
8.70	2.328, +5	89.88	10.80	2438	2.113, +5	1115.75	71.69	4560	3.749, +4
8.80	2.355, +5	91.98	10.86	2482	2.138, +5	1147.24	72.27	4651	3.780, +4
8.90	2.382, +5	94.10	10.91	2528	2.164, +5	1179.23	72.81	4745	3.813, +4
9.00	2.409, +5	96.25	10.96	2573	2.189, +5	1211.60	73.37	4838	3.844, +4
9.10	2.435, +5	98.43	11.01	2619	2.214, +5	1244.36	73.94	4931	3.874, +4
9.20	2.462, +5	100.62	11.06	2666	2.240, +5				
9.30	2.489, +5	102.85	11.11	2713	2.265, +5				
9.40	2.516, +5	105.09	11.16	2760	2.290, +5				
9.50	2.543, +5	107.36	11.20	2808	2.316, +5				
9.60	2.569, +5	109.66	11.25	2856	2.341, +5				
9.70	2.596, +5	111.98	11.29	2905	2.366, +5				
9.80	2.623, +5	114.32	11.34	2954	2.391, +5				
9.90	2.650, +5	116.69	11.38	3004	2.417, +5				
10.00	2.676, +5	119.08	11.42	3054	2.442, +5				
10.10	2.703, +5	121.49	11.47	3105	2.467, +5				
10.20	2.730, +5	123.93	11.51	3156	2.493, +5				
10.30	2.757, +5	126.40	11.55	3207	2.518, +5				
10.40	2.783, +5	128.88	11.59	3259	2.543, +5				
10.50	2.810, +5	131.40	11.63	3312	2.568, +5				
10.60	2.837, +5	133.93	11.66	3364	2.594, +5				
10.70	2.864, +5	136.49	11.70	3418	2.619, +5				
10.80	2.890, +5	139.08	11.74	3472	2.644, +5				
10.90	2.917, +5	141.69	11.77	3526	2.669, +5				
11.00	2.944, +5	144.32	11.81	3580	2.695, +5				
11.10	2.971, +5	146.98	11.85	3636	2.720, +5				
11.20	2.998, +5	149.66	11.88	3691	2.745, +5				
11.30	3.024, +5	152.37	11.91	3747	2.770, +5				
11.40	3.051, +5	155.10	11.95	3804	2.796, +5				

## CARBON DIOXIDE

T1 293.0

## INCIDENT SHOCK

M	U1	P21	R21	T2	U2
11.50	3.078, +5	157.85	11.98	3861	2.821, +5
11.60	3.105, +5	160.63	12.01	3918	2.846, +5
11.70	3.131, +5	163.43	12.04	3976	2.871, +5
11.80	3.158, +5	166.26	12.08	4034	2.897, +5
11.90	3.185, +5	169.11	12.11	4093	2.922, +5
12.00	3.212, +5	171.99	12.14	4152	2.947, +5
12.10	3.238, +5	174.89	12.17	4212	2.972, +5
12.20	3.265, +5	177.81	12.20	4272	2.997, +5
12.30	3.292, +5	180.76	12.23	4332	3.023, +5
12.40	3.319, +5	183.73	12.25	4393	3.048, +5
12.50	3.345, +5	186.73	12.28	4455	3.073, +5
12.60	3.372, +5	189.75	12.31	4517	3.098, +5
12.70	3.399, +5	192.80	12.34	4579	3.123, +5
12.80	3.426, +5	195.87	12.36	4642	3.149, +5
12.90	3.452, +5	198.96	12.39	4705	3.174, +5
13.00	3.479, +5	202.08	12.42	4768	3.199, +5
13.10	3.506, +5	205.22	12.44	4833	3.224, +5
13.20	3.533, +5	208.39	12.47	4897	3.249, +5
13.30	3.560, +5	211.58	12.49	4962	3.275, +5

CARBON MONOXIDE

T1 293.0

Table 5.4

INCIDENT SHOCK

REFLECTED SHOCK

M	U1	P21	R21	T2	U2	P31	R31	T3	U3
1.10	3.849, +4	1.25	1.17	313	5.724, +3	1.56	1.37	333	3.389, +4
1.20	4.199, +4	1.52	1.35	331	1.084, +4	2.26	1.79	371	3.327, +4
1.30	4.549, +4	1.82	1.52	350	1.562, +4	3.14	2.25	410	3.292, +4
1.40	4.899, +4	2.13	1.70	368	2.013, +4	4.21	2.74	450	3.277, +4
1.50	5.249, +4	2.47	1.87	387	2.444, +4	5.48	3.27	492	3.276, +4
1.60	5.598, +4	2.84	2.04	407	2.857, +4	6.96	3.82	534	3.287, +4
1.70	5.948, +4	3.23	2.21	428	3.257, +4	8.66	4.39	579	3.308, +4
1.80	6.298, +4	3.64	2.37	449	3.646, +4	10.59	4.97	624	3.335, +4
1.90	6.648, +4	4.08	2.53	471	4.024, +4	12.74	5.56	671	3.368, +4
2.00	6.998, +4	4.54	2.69	494	4.395, +4	15.14	6.16	720	3.406, +4
2.10	7.348, +4	5.02	2.84	518	4.759, +4	17.77	6.76	770	3.447, +4
2.20	7.698, +4	5.53	2.98	543	5.118, +4	20.64	7.36	822	3.491, +4
2.30	8.048, +4	6.06	3.12	569	5.472, +4	23.77	7.96	875	3.537, +4
2.40	8.398, +4	6.62	3.26	595	5.821, +4	27.14	8.55	930	3.585, +4
2.50	8.748, +4	7.20	3.39	623	6.167, +4	30.76	9.14	986	3.635, +4
2.60	9.098, +4	7.81	3.52	651	6.510, +4	34.64	9.73	1044	3.686, +4
2.70	9.447, +4	8.44	3.64	680	6.850, +4	38.78	10.30	1103	3.739, +4
2.80	9.797, +4	9.10	3.76	710	7.188, +4	43.18	10.87	1164	3.793, +4
2.90	1.015, +5	9.78	3.87	741	7.525, +4	47.85	11.44	1226	3.848, +4
3.00	1.050, +5	10.48	3.98	772	7.858, +4	52.75	11.98	1290	3.905, +4
3.10	1.085, +5	11.21	4.08	805	8.190, +4	57.95	12.52	1356	3.963, +4
3.20	1.120, +5	11.97	4.19	838	8.522, +4	63.42	13.06	1423	4.021, +4
3.30	1.155, +5	12.75	4.28	872	8.851, +4	69.13	13.57	1492	4.081, +4
3.40	1.190, +5	13.56	4.38	907	9.180, +4	75.14	14.09	1563	4.142, +4
3.50	1.225, +5	14.39	4.47	943	9.508, +4	81.43	14.59	1635	4.203, +4
3.60	1.260, +5	15.25	4.56	979	9.836, +4	88.01	15.09	1709	4.265, +4
3.70	1.295, +5	16.13	4.65	1016	1.016, +5	94.86	15.57	1785	4.328, +4
3.80	1.330, +5	17.03	4.74	1054	1.049, +5	102.01	16.04	1863	4.392, +4
3.90	1.365, +5	17.97	4.82	1093	1.081, +5	109.43	16.51	1942	4.456, +4
4.00	1.400, +5	18.92	4.90	1133	1.114, +5	117.09	16.95	2024	4.522, +4
4.10	1.435, +5	19.91	4.97	1173	1.146, +5	125.07	17.40	2106	4.586, +4
4.20	1.470, +5	20.91	5.05	1214	1.178, +5	133.35	17.84	2191	4.652, +4
4.30	1.505, +5	21.95	5.12	1256	1.211, +5	141.92	18.26	2277	4.719, +4
4.40	1.540, +5	23.00	5.19	1298	1.243, +5	150.78	18.68	2366	4.787, +4
4.50	1.575, +5	24.09	5.26	1341	1.275, +5	159.93	19.08	2456	4.855, +4
4.60	1.610, +5	25.20	5.33	1386	1.307, +5	169.36	19.48	2548	4.923, +4
4.70	1.645, +5	26.33	5.39	1430	1.340, +5	179.09	19.87	2641	4.992, +4
4.80	1.680, +5	27.49	5.46	1476	1.372, +5	189.10	20.24	2737	5.062, +4
4.90	1.715, +5	28.67	5.52	1523	1.404, +5	199.41	20.61	2834	5.132, +4
5.00	1.750, +5	29.88	5.58	1570	1.436, +5	210.00	20.97	2934	5.202, +4
5.10	1.785, +5	31.12	5.64	1618	1.468, +5	220.88	21.32	3035	5.273, +4
5.20	1.820, +5	32.38	5.69	1667	1.500, +5	232.04	21.67	3138	5.344, +4
5.30	1.854, +5	33.66	5.75	1716	1.532, +5	243.50	22.00	3243	5.415, +4
5.40	1.889, +5	34.97	5.80	1767	1.564, +5	255.13	22.31	3350	5.488, +4
5.50	1.924, +5	36.30	5.85	1819	1.595, +5	267.15	22.63	3458	5.560, +4
5.60	1.959, +5	37.66	5.90	1871	1.627, +5	279.45	22.94	3569	5.632, +4
5.70	1.994, +5	39.05	5.95	1923	1.659, +5	292.04	23.25	3681	5.705, +4
5.80	2.029, +5	40.46	6.00	1977	1.691, +5	304.91	23.54	3795	5.778, +4
5.90	2.064, +5	41.89	6.04	2032	1.723, +5	318.07	23.83	3911	5.851, +4
6.00	2.099, +5	43.35	6.09	2087	1.754, +5	331.49	24.12	4027	5.923, +4
6.10	2.134, +5	44.84	6.13	2143	1.786, +5	345.22	24.39	4147	5.996, +4
6.20	2.169, +5	46.35	6.17	2200	1.818, +5	359.23	24.66	4268	6.070, +4

## CARBON MONOXIDE

T1 293.0

## INCIDENT SHOCK

## REFLECTED SHOCK

M	U1	P21	R21	T2	U2	P31	R31	T3	U3
6.30	2.204, +5	47.88	6.21	2258	1.850, +5	373.53	24.92	4392	6.144, +4
6.40	2.239, +5	49.44	6.25	2316	1.881, +5	388.10	25.18	4517	6.218, +4
6.50	2.274, +5	51.03	6.29	2375	1.913, +5	402.96	25.43	4643	6.293, +4
6.60	2.309, +5	52.64	6.33	2436	1.945, +5	418.09	25.67	4772	6.367, +4
6.70	2.344, +5	54.27	6.37	2497	1.976, +5	433.51	25.91	4903	6.442, +4
6.80	2.379, +5	55.93	6.41	2558	2.008, +5				
6.90	2.414, +5	57.62	6.44	2621	2.039, +5				
7.00	2.449, +5	59.32	6.47	2685	2.071, +5				
7.10	2.484, +5	61.06	6.51	2749	2.103, +5				
7.20	2.519, +5	62.82	6.54	2814	2.134, +5				
7.30	2.554, +5	64.60	6.57	2880	2.166, +5				
7.40	2.589, +5	66.41	6.60	2947	2.197, +5				
7.50	2.624, +5	68.25	6.63	3014	2.229, +5				
7.60	2.659, +5	70.11	6.66	3083	2.260, +5				
7.70	2.694, +5	71.99	6.69	3152	2.292, +5				
7.80	2.729, +5	73.90	6.72	3222	2.323, +5				
7.90	2.764, +5	75.83	6.75	3293	2.355, +5				
8.00	2.799, +5	77.79	6.77	3365	2.386, +5				
8.10	2.834, +5	79.78	6.80	3437	2.417, +5				
8.20	2.869, +5	81.79	6.83	3511	2.449, +5				
8.30	2.904, +5	83.82	6.85	3585	2.480, +5				
8.40	2.939, +5	85.88	6.87	3660	2.512, +5				
8.50	2.974, +5	87.96	6.90	3736	2.543, +5				
8.60	3.009, +5	90.07	6.92	3813	2.574, +5				
8.70	3.044, +5	92.21	6.94	3890	2.606, +5				
8.80	3.079, +5	94.37	6.97	3969	2.637, +5				
8.90	3.114, +5	96.55	6.99	4048	2.669, +5				
9.00	3.149, +5	98.76	7.01	4128	2.700, +5				
9.10	3.184, +5	100.99	7.03	4209	2.731, +5				
9.20	3.219, +5	103.25	7.05	4291	2.763, +5				
9.30	3.254, +5	105.53	7.07	4374	2.794, +5				
9.40	3.289, +5	107.84	7.09	4457	2.825, +5				
9.50	3.324, +5	110.18	7.11	4540	2.857, +5				
9.60	3.359, +5	112.53	7.13	4626	2.888, +5				
9.70	3.394, +5	114.92	7.15	4712	2.919, +5				
9.80	3.429, +5	117.33	7.17	4798	2.950, +5				
9.90	3.464, +5	119.76	7.18	4886	2.982, +5				
10.00	3.499, +5	122.20	7.19	4977	3.013, +5				

## HYDROGEN

T1 297.0

Table 5.5

## INCIDENT SHOCK

## REFLECTED SHOCK

M	U1	P21	R21	T2	U2	P31	R31	T3	U3
1.10	1.458, +5	1.30	1.20	316	2.448, +4	1.66	1.43	339	1.261, +5
1.20	1.591, +5	1.57	1.38	335	4.364, +4	2.41	1.86	379	1.240, +5
1.30	1.723, +5	1.88	1.56	354	6.155, +4	3.34	2.33	419	1.229, +5
1.40	1.856, +5	2.21	1.73	373	7.849, +4	4.47	2.84	460	1.225, +5
1.50	1.989, +5	2.56	1.91	393	9.465, +4	5.81	3.38	504	1.228, +5
1.60	2.121, +5	2.93	2.08	413	1.102, +5	7.37	3.94	549	1.236, +5
1.70	2.254, +5	3.33	2.25	434	1.252, +5	9.16	4.50	596	1.248, +5
1.80	2.386, +5	3.76	2.41	456	1.397, +5	11.18	5.08	645	1.263, +5
1.90	2.519, +5	4.21	2.57	480	1.539, +5	13.45	5.66	696	1.282, +5
2.00	2.651, +5	4.68	2.72	504	1.678, +5	15.96	6.24	750	1.302, +5
2.10	2.784, +5	5.18	2.87	529	1.814, +5	18.71	6.80	806	1.324, +5
2.20	2.916, +5	5.70	3.01	555	1.948, +5	21.71	7.37	863	1.348, +5
2.30	3.049, +5	6.25	3.15	582	2.080, +5	24.95	7.92	923	1.372, +5
2.40	3.182, +5	6.82	3.28	610	2.210, +5	28.44	8.45	986	1.398, +5
2.50	3.314, +5	7.41	3.40	639	2.339, +5	32.16	8.98	1050	1.424, +5
2.60	3.447, +5	8.03	3.51	670	2.466, +5	36.13	9.49	1115	1.451, +5
2.70	3.579, +5	8.68	3.63	701	2.592, +5	40.33	9.99	1183	1.477, +5
2.80	3.712, +5	9.35	3.73	734	2.717, +5	44.77	10.48	1252	1.503, +5
2.90	3.844, +5	10.04	3.83	767	2.842, +5	49.45	10.95	1323	1.530, +5
3.00	3.977, +5	10.76	3.93	802	2.965, +5	54.36	11.42	1395	1.556, +5
3.10	4.110, +5	11.50	4.02	838	3.088, +5	59.50	11.87	1468	1.582, +5
3.20	4.242, +5	12.27	4.11	875	3.210, +5	64.88	12.32	1544	1.608, +5
3.30	4.375, +5	13.06	4.19	912	3.332, +5	70.49	12.75	1620	1.634, +5
3.40	4.507, +5	13.88	4.28	951	3.453, +5	76.34	13.17	1698	1.659, +5
3.50	4.640, +5	14.72	4.35	991	3.574, +5	82.44	13.59	1777	1.685, +5
3.60	4.772, +5	15.59	4.43	1032	3.695, +5	88.76	14.00	1857	1.709, +5
3.70	4.905, +5	16.49	4.50	1073	3.815, +5	95.35	14.41	1939	1.734, +5
3.80	5.038, +5	17.41	4.57	1116	3.936, +5	102.18	14.80	2023	1.759, +5
3.90	5.170, +5	18.35	4.64	1159	4.056, +5	109.27	15.19	2108	1.783, +5
4.00	5.303, +5	19.32	4.71	1203	4.176, +5	116.61	15.57	2194	1.808, +5
4.10	5.435, +5	20.32	4.77	1248	4.296, +5	124.22	15.95	2282	1.832, +5
4.20	5.568, +5	21.35	4.83	1294	4.416, +5	132.10	16.33	2371	1.856, +5
4.30	5.700, +5	22.39	4.89	1341	4.535, +5	140.16	16.68	2461	1.881, +5
4.40	5.833, +5	23.47	4.95	1389	4.655, +5	148.57	17.05	2553	1.905, +5
4.50	5.966, +5	24.57	5.01	1437	4.775, +5	157.25	17.41	2647	1.929, +5
4.60	6.098, +5	25.70	5.07	1486	4.894, +5	166.21	17.76	2742	1.953, +5
4.70	6.231, +5	26.85	5.12	1537	5.014, +5	175.36	18.10	2838	1.977, +5
4.80	6.363, +5	28.03	5.17	1587	5.134, +5	184.87	18.45	2936	2.001, +5
4.90	6.496, +5	29.24	5.23	1639	5.253, +5	194.67	18.79	3035	2.025, +5
5.00	6.628, +5	30.47	5.28	1691	5.373, +5	204.76	19.13	3136	2.049, +5
5.10	6.761, +5	31.73	5.33	1744	5.493, +5	215.14	19.47	3238	2.072, +5
5.20	6.894, +5	33.02	5.38	1797	5.613, +5	225.82	19.80	3341	2.096, +5
5.30	7.026, +5	34.34	5.43	1851	5.733, +5	236.80	20.13	3446	2.119, +5
5.40	7.159, +5	35.67	5.48	1907	5.853, +5	247.95	20.45	3553	2.143, +5
5.50	7.291, +5	37.04	5.53	1963	5.973, +5	259.50	20.77	3660	2.167, +5
5.60	7.424, +5	38.43	5.58	2019	6.093, +5	271.36	21.09	3769	2.190, +5
5.70	7.556, +5	39.85	5.62	2076	6.213, +5	283.52	21.41	3880	2.213, +5
5.80	7.689, +5	41.30	5.67	2134	6.333, +5	295.99	21.73	3991	2.236, +5
5.90	7.822, +5	42.77	5.72	2192	6.453, +5	308.76	22.04	4104	2.260, +5
6.00	7.954, +5	44.27	5.76	2251	6.573, +5	321.83	22.35	4219	2.283, +5
6.10	8.087, +5	45.80	5.81	2311	6.694, +5	335.22	22.66	4334	2.306, +5
6.20	8.219, +5	47.35	5.85	2372	6.814, +5	348.91	22.97	4451	2.329, +5

## HYDROGEN

T1 293.0

## INCIDENT SHOCK

## REFLECTED SHOCK

M	U1	P21	R21	T2	U2	P31	R31	T3	U3
6.30	8.352, +5	48.93	5.89	2433	6.934, +5	362.91	23.27	4569	2.351, +5
6.40	8.484, +5	50.53	5.93	2495	7.055, +5	377.22	23.57	4689	2.374, +5
6.50	8.617, +5	52.17	5.98	2557	7.175, +5	391.83	23.87	4809	2.396, +5
6.60	8.749, +5	53.82	6.02	2621	7.296, +5	406.77	24.17	4932	2.419, +5
6.70	8.882, +5	55.51	6.06	2685	7.416, +5				
6.80	9.015, +5	57.22	6.10	2749	7.536, +5				
6.90	9.147, +5	58.96	6.14	2815	7.656, +5				
7.00	9.280, +5	60.72	6.17	2882	7.777, +5				
7.10	9.412, +5	62.51	6.21	2948	7.897, +5				
7.20	9.545, +5	64.33	6.25	3016	8.018, +5				
7.30	9.677, +5	66.18	6.29	3084	8.138, +5				
7.40	9.810, +5	68.05	6.32	3152	8.259, +5				
7.50	9.943, +5	69.95	6.36	3222	8.380, +5				
7.60	1.008, +6	71.87	6.40	3292	8.500, +5				
7.70	1.021, +6	73.82	6.43	3362	8.621, +5				
7.80	1.034, +6	75.80	6.47	3434	8.742, +5				
7.90	1.047, +6	77.81	6.50	3506	8.862, +5				
8.00	1.061, +6	79.84	6.54	3578	8.983, +5				
8.10	1.074, +6	81.90	6.57	3652	9.104, +5				
8.20	1.087, +6	83.99	6.61	3726	9.225, +5				
8.30	1.100, +6	86.10	6.64	3800	9.346, +5				
8.40	1.114, +6	88.24	6.67	3875	9.467, +5				
8.50	1.127, +6	90.40	6.70	3951	9.587, +5				
8.60	1.140, +6	92.60	6.74	4028	9.708, +5				
8.70	1.153, +6	94.82	6.77	4105	9.829, +5				
8.80	1.167, +6	97.06	6.80	4182	9.950, +5				
8.90	1.180, +6	99.33	6.83	4261	1.007, +6				
9.00	1.193, +6	101.63	6.86	4340	1.019, +6				
9.10	1.206, +6	103.96	6.89	4420	1.031, +6				
9.20	1.220, +6	106.31	6.92	4500	1.043, +6				
9.30	1.233, +6	108.70	6.95	4580	1.056, +6				
9.40	1.246, +6	111.10	6.96	4662	1.068, +6				
9.50	1.259, +6	113.54	7.01	4744	1.080, +6				
9.60	1.273, +6	116.00	7.04	4826	1.092, +6				
9.70	1.286, +6	118.49	7.07	4910	1.104, +6				

NITROGEN

T1 293.0

Table 5 6

INCIDENT SHOCK

REFLECTED SHOCK

M	U1	P21	R21	T2	U2	P31	R31	T3	U3
1.10	3.856, +4	1.26	1.18	313	5.841, +3	1.57	1.38	334	3.386, +4
1.20	4.206, +4	1.53	1.35	332	1.095, +4	2.28	1.80	372	3.378, +4
1.30	4.557, +4	1.82	1.53	350	1.573, +4	3.17	2.26	412	3.295, +4
1.40	4.907, +4	2.14	1.70	369	2.024, +4	4.24	2.75	452	3.282, +4
1.50	5.258, +4	2.48	1.88	388	2.454, +4	5.52	3.28	494	3.284, +4
1.60	5.608, +4	2.85	2.05	408	2.867, +4	7.01	3.83	537	3.297, +4
1.70	5.959, +4	3.24	2.21	429	3.266, +4	8.71	4.39	582	3.320, +4
1.80	6.309, +4	3.65	2.38	450	3.654, +4	10.65	4.97	628	3.350, +4
1.90	6.660, +4	4.09	2.54	473	4.033, +4	12.81	5.55	676	3.386, +4
2.00	7.010, +4	4.55	2.69	496	4.403, +4	15.21	6.14	725	3.427, +4
2.10	7.361, +4	5.03	2.84	520	4.766, +4	17.84	6.73	776	3.470, +4
2.20	7.711, +4	5.54	2.98	545	5.124, +4	20.72	7.32	829	3.517, +4
2.30	8.062, +4	6.08	3.12	571	5.477, +4	23.84	7.91	883	3.566, +4
2.40	8.412, +4	6.64	3.25	598	5.826, +4	27.21	8.49	939	3.616, +4
2.50	8.763, +4	7.22	3.38	626	6.171, +4	30.82	9.07	996	3.667, +4
2.60	9.113, +4	7.83	3.50	654	6.513, +4	34.69	9.64	1054	3.721, +4
2.70	9.464, +4	8.46	3.62	684	6.852, +4	38.81	10.20	1115	3.776, +4
2.80	9.814, +4	9.11	3.74	714	7.190, +4	43.19	10.76	1176	3.831, +4
2.90	1.016, +5	9.80	3.85	745	7.525, +4	47.83	11.30	1240	3.888, +4
3.00	1.052, +5	10.50	3.96	777	7.859, +4	52.74	11.84	1305	3.946, +4
3.10	1.087, +5	11.23	4.06	811	8.190, +4	57.88	12.37	1371	4.005, +4
3.20	1.122, +5	11.99	4.16	844	8.521, +4	63.31	12.88	1440	4.064, +4
3.30	1.157, +5	12.77	4.26	879	8.850, +4	69.01	13.40	1509	4.124, +4
3.40	1.192, +5	13.58	4.35	914	9.179, +4	74.98	13.90	1581	4.185, +4
3.50	1.227, +5	14.41	4.44	951	9.506, +4	81.19	14.38	1654	4.248, +4
3.60	1.262, +5	15.27	4.53	988	9.833, +4	87.71	14.86	1729	4.310, +4
3.70	1.297, +5	16.15	4.62	1025	1.016, +5	94.51	15.34	1806	4.374, +4
3.80	1.332, +5	17.06	4.70	1064	1.048, +5	101.59	15.80	1884	4.438, +4
3.90	1.367, +5	17.99	4.78	1103	1.081, +5	108.95	16.25	1964	4.502, +4
4.00	1.402, +5	18.95	4.86	1143	1.113, +5	116.60	16.70	2046	4.567, +4
4.10	1.437, +5	19.94	4.93	1184	1.146, +5	124.53	17.14	2129	4.632, +4
4.20	1.472, +5	20.94	5.01	1226	1.178, +5	132.68	17.55	2215	4.699, +4
4.30	1.507, +5	21.98	5.09	1268	1.210, +5	141.18	17.97	2302	4.766, +4
4.40	1.542, +5	23.04	5.15	1312	1.243, +5	149.97	18.38	2391	4.834, +4
4.50	1.577, +5	24.12	5.21	1356	1.275, +5	159.05	18.77	2482	4.902, +4
4.60	1.612, +5	25.23	5.28	1400	1.307, +5	168.41	19.16	2575	4.970, +4
4.70	1.647, +5	26.37	5.34	1446	1.339, +5	178.07	19.55	2669	5.040, +4
4.80	1.682, +5	27.53	5.41	1492	1.371, +5	188.01	19.92	2766	5.109, +4
4.90	1.717, +5	28.72	5.47	1539	1.403, +5	198.24	20.28	2864	5.179, +4
5.00	1.753, +5	29.93	5.53	1587	1.435, +5	208.76	20.64	2964	5.249, +4
5.10	1.788, +5	31.17	5.58	1635	1.467, +5	219.57	20.99	3066	5.320, +4
5.20	1.823, +5	32.43	5.64	1685	1.499, +5	230.67	21.32	3169	5.391, +4
5.30	1.858, +5	33.72	5.69	1735	1.531, +5	242.06	21.66	3275	5.463, +4
5.40	1.893, +5	35.03	5.75	1786	1.563, +5	253.74	21.98	3382	5.534, +4
5.50	1.928, +5	36.37	5.80	1838	1.595, +5	265.70	22.30	3492	5.606, +4
5.60	1.963, +5	37.73	5.85	1890	1.627, +5	277.95	22.60	3603	5.679, +4
5.70	1.998, +5	39.12	5.89	1944	1.659, +5	290.36	22.89	3716	5.753, +4
5.80	2.033, +5	40.53	5.94	1999	1.691, +5	303.17	23.19	3831	5.826, +4
5.90	2.068, +5	41.97	5.99	2054	1.723, +5	316.27	23.47	3948	5.899, +4
6.00	2.103, +5	43.43	6.03	2109	1.754, +5	329.64	23.76	4065	5.971, +4
6.10	2.138, +5	44.92	6.08	2166	1.786, +5	343.31	24.03	4186	6.044, +4
6.20	2.173, +5	46.43	6.12	2224	1.818, +5	357.26	24.30	4308	6.118, +4



NITROGEN

T1 293.0

INCIDENT SHOCK

REFLECTED SHOCK

M	U1	P21	R21	T2	U2	P31	R31	T3	U3
6.30	2.208, +5	47.97	6.16	2282	1.850, +5	371.50	24.56	4432	6.193, +4
6.40	2.243, +5	49.54	6.20	2341	1.881, +5	386.02	24.81	4558	6.267, +4
6.50	2.278, +5	51.13	6.24	2401	1.913, +5	400.83	25.06	4686	6.342, +4
6.60	2.313, +5	52.74	6.28	2461	1.945, +5	415.92	25.31	4815	6.416, +4
6.70	2.348, +5	54.38	6.32	2523	1.977, +5	431.27	25.55	4946	6.490, +4
6.80	2.383, +5	56.04	6.35	2585	2.008, +5				
6.90	2.418, +5	57.73	6.39	2649	2.040, +5				
7.00	2.454, +5	59.45	6.42	2713	2.071, +5				
7.10	2.489, +5	61.19	6.46	2777	2.103, +5				
7.20	2.524, +5	62.95	6.49	2843	2.135, +5				
7.30	2.559, +5	64.74	6.52	2909	2.166, +5				
7.40	2.594, +5	66.56	6.55	2977	2.198, +5				
7.50	2.629, +5	68.40	6.58	3045	2.229, +5				
7.60	2.664, +5	70.26	6.61	3114	2.261, +5				
7.70	2.699, +5	72.15	6.64	3184	2.292, +5				
7.80	2.734, +5	74.07	6.67	3254	2.324, +5				
7.90	2.769, +5	76.01	6.70	3326	2.355, +5				
8.00	2.804, +5	77.97	6.72	3398	2.387, +5				
8.10	2.839, +5	79.96	6.75	3471	2.418, +5				
8.20	2.874, +5	81.98	6.78	3545	2.450, +5				
8.30	2.909, +5	84.02	6.80	3620	2.481, +5				
8.40	2.944, +5	86.08	6.82	3696	2.513, +5				
8.50	2.979, +5	88.17	6.85	3772	2.544, +5				
8.60	3.014, +5	90.29	6.87	3849	2.576, +5				
8.70	3.049, +5	92.43	6.90	3928	2.607, +5				
8.80	3.084, +5	94.60	6.92	4007	2.639, +5				
8.90	3.119, +5	96.79	6.94	4086	2.670, +5				
9.00	3.155, +5	99.00	6.96	4167	2.701, +5				
9.10	3.190, +5	101.24	6.98	4249	2.733, +5				
9.20	3.225, +5	103.51	7.00	4331	2.764, +5				
9.30	3.260, +5	105.80	7.02	4414	2.795, +5				
9.40	3.295, +5	108.11	7.04	4499	2.827, +5				
9.50	3.330, +5	110.46	7.06	4582	2.858, +5				
9.60	3.365, +5	112.82	7.08	4668	2.890, +5				
9.70	3.400, +5	115.21	7.10	4755	2.921, +5				
9.80	3.435, +5	117.63	7.12	4842	2.952, +5				
9.90	3.470, +5	120.07	7.14	4930	2.984, +5				

NITROUS OXIDE

T1 293.0

Table 5.7

INCIDENT SHOCK

REFLECTED SHOCK

H	U1	P21	P21	T2	U2	P31	R31	T1	U3
1.10	2.925, +4	1.24	1.16	307	4.509, +3	1.53	1.39	321	2.527, +1
1.20	3.191, +4	1.50	1.37	320	8.694, +3	2.21	1.87	347	2.426, +4
1.30	3.457, +4	1.79	1.57	333	1.257, +4	3.07	2.41	373	2.348, +4
1.40	3.723, +4	2.09	1.77	346	1.625, +4	4.13	3.03	399	2.287, +4
1.50	3.988, +4	2.42	1.98	358	1.975, +4	5.40	3.73	425	2.240, +4
1.60	4.254, +4	2.78	2.19	372	2.311, +4	6.90	4.49	451	2.203, +4
1.70	4.520, +4	3.15	2.40	385	2.636, +4	9.65	5.30	478	2.176, +4
1.80	4.786, +4	3.55	2.61	399	2.952, +4	10.66	6.18	505	2.156, +4
1.90	5.052, +4	3.98	2.82	413	3.260, +4	12.95	7.11	533	2.141, +1
2.00	5.318, +4	4.42	3.03	428	3.562, +4	15.52	8.09	562	2.131, +4
2.10	5.584, +4	4.89	3.24	443	3.859, +4	18.40	9.11	592	2.126, +4
2.20	5.850, +4	5.39	3.44	458	4.151, +4	21.59	10.17	622	2.124, +4
2.30	6.116, +4	5.90	3.65	474	4.439, +4	25.10	11.27	653	2.125, +4
2.40	6.382, +4	6.45	3.85	491	4.723, +4	28.95	12.39	685	2.129, +1
2.50	6.647, +4	7.01	4.05	508	5.004, +4	33.13	13.53	717	2.135, +4
2.60	6.913, +4	7.60	4.24	525	5.283, +4	37.66	14.70	751	2.142, +4
2.70	7.179, +4	8.21	4.43	543	5.560, +4	42.55	15.88	785	2.152, +4
2.80	7.445, +4	8.85	4.62	561	5.834, +4	47.80	17.08	820	2.163, +4
2.90	7.711, +4	9.51	4.81	580	6.106, +4	53.42	18.29	856	2.176, +4
3.00	7.977, +4	10.19	4.99	599	6.377, +4	59.42	19.51	892	2.190, +4
3.10	8.243, +4	10.90	5.16	618	6.647, +4	65.80	20.73	930	2.205, +4
3.20	8.509, +4	11.63	5.34	638	6.915, +4	72.58	21.97	968	2.220, +4
3.30	8.775, +4	12.39	5.51	659	7.182, +4	79.74	23.20	1007	2.237, +4
3.40	9.040, +4	13.17	5.69	679	7.448, +4	87.30	24.43	1047	2.254, +4
3.50	9.306, +4	13.97	5.81	701	7.713, +4	95.26	25.66	1088	2.273, +4
3.60	9.572, +4	14.30	6.00	722	7.977, +4	103.62	26.89	1129	2.292, +4
3.70	9.838, +4	15.65	6.16	745	8.241, +4	112.40	28.11	1172	2.312, +4
3.80	1.010, +5	16.52	6.31	767	8.503, +4	121.60	29.32	1215	2.332, +4
3.90	1.037, +5	17.42	6.46	790	8.765, +4	131.21	30.53	1259	2.353, +4
4.00	1.064, +5	18.35	6.61	813	9.027, +4	141.24	31.73	1304	2.375, +4
4.10	1.090, +5	19.29	6.75	837	9.287, +4	151.70	32.92	1350	2.397, +4
4.20	1.117, +5	20.27	6.89	861	9.548, +4	162.59	34.10	1397	2.419, +4
4.30	1.143, +5	21.26	7.03	886	9.808, +4	173.91	35.27	1445	2.442, +4
4.40	1.170, +5	22.28	7.17	911	1.007, +5	185.66	36.43	1493	2.465, +4
4.50	1.197, +5	23.32	7.30	936	1.033, +5	197.84	37.58	1543	2.489, +4
4.60	1.223, +5	24.39	7.43	962	1.058, +5	210.47	38.72	1593	2.513, +1
4.70	1.250, +5	25.48	7.55	988	1.084, +5	223.53	39.84	1644	2.538, +1
4.80	1.276, +5	26.60	7.68	1015	1.110, +5	237.03	40.95	1696	2.562, +4
4.90	1.303, +5	27.74	7.80	1042	1.136, +5	250.98	42.04	1749	2.587, +4
5.00	1.329, +5	28.90	7.92	1069	1.162, +5	265.37	43.13	1803	2.613, +4
5.10	1.356, +5	30.09	8.03	1097	1.187, +5	280.20	44.20	1857	2.638, +4
5.20	1.383, +5	31.30	8.15	1126	1.213, +5	295.48	45.26	1913	2.663, +4
5.30	1.409, +5	32.54	8.26	1154	1.239, +5	311.22	46.31	1969	2.689, +4
5.40	1.436, +5	33.80	8.37	1183	1.264, +5	327.39	47.34	2026	2.715, +4
5.50	1.462, +5	35.08	8.48	1213	1.290, +5	344.02	48.35	2085	2.742, +4
5.60	1.489, +5	36.39	8.58	1241	1.315, +5	361.10	49.35	2141	2.769, +4
5.70	1.516, +5	37.72	8.68	1273	1.341, +5	378.63	50.33	2204	2.796, +4
5.80	1.542, +5	39.08	8.78	1304	1.367, +5	396.61	51.30	2265	2.823, +4
5.90	1.569, +5	40.46	8.88	1335	1.392, +5	415.05	52.25	2327	2.850, +4
6.00	1.595, +5	41.86	8.98	1367	1.418, +5	433.93	53.19	2390	2.878, +1
6.10	1.622, +5	43.29	9.07	1399	1.443, +5	453.27	54.12	2454	2.905, +4
6.20	1.649, +5	44.74	9.17	1431	1.469, +5	473.06	55.03	2519	2.933, +1

NITROUS OXIDE

T1 297.0

INCIDENT SHOCK

REFLECTED SHOCK

M	U1	P21	R21	T2	U2	P31	R31	T3	U3
6.30	1.675, +5	46.72	9.25	1464	1.494, +5	493.31	55.93	2504	2.961, +4
6.40	1.702, +5	47.72	9.31	1497	1.520, +5	514.00	56.82	2651	2.990, +4
6.50	1.728, +5	49.25	9.41	1531	1.545, +5	535.14	57.70	2717	3.017, +4
6.60	1.755, +5	50.79	9.51	1565	1.570, +5	556.75	58.55	2786	3.046, +4
6.70	1.782, +5	52.37	9.59	1599	1.596, +5	578.80	59.40	2855	3.074, +4
6.80	1.808, +5	53.96	9.67	1634	1.621, +5	601.30	60.23	2925	3.102, +4
6.90	1.835, +5	55.58	9.75	1670	1.647, +5	624.26	61.05	2996	3.131, +4
7.00	1.861, +5	57.23	9.83	1705	1.672, +5	647.66	61.86	3068	3.160, +4
7.10	1.888, +5	58.90	9.91	1742	1.697, +5	671.52	62.65	3140	3.188, +4
7.20	1.914, +5	60.59	9.99	1778	1.723, +5	695.82	63.44	3214	3.217, +4
7.30	1.941, +5	62.30	10.06	1815	1.749, +5	720.58	64.21	3288	3.246, +4
7.40	1.968, +5	64.05	10.13	1853	1.773, +5	745.78	64.97	3363	3.275, +4
7.50	1.994, +5	65.81	10.20	1891	1.799, +5	771.44	65.72	3440	3.304, +4
7.60	2.021, +5	67.60	10.27	1929	1.824, +5	797.54	66.45	3516	3.333, +4
7.70	2.047, +5	69.41	10.33	1968	1.849, +5	824.09	67.18	3594	3.362, +4
7.80	2.074, +5	71.25	10.40	2007	1.875, +5	851.09	67.89	3673	3.391, +4
7.90	2.101, +5	73.11	10.47	2047	1.900, +5	878.54	68.60	3752	3.420, +4
8.00	2.127, +5	74.99	10.53	2087	1.925, +5	906.43	69.29	3833	3.450, +4
8.10	2.154, +5	76.90	10.59	2127	1.950, +5	934.78	69.98	3914	3.479, +4
8.20	2.180, +5	78.83	10.65	2168	1.976, +5	963.65	70.64	3997	3.509, +4
8.30	2.207, +5	80.79	10.71	2209	2.001, +5	992.90	71.30	4080	3.538, +4
8.40	2.234, +5	82.77	10.77	2251	2.026, +5	1022.59	71.96	4164	3.568, +4
8.50	2.260, +5	84.77	10.83	2293	2.051, +5	1052.78	72.58	4250	3.598, +4
8.60	2.287, +5	86.80	10.89	2336	2.077, +5	1083.37	73.22	4335	3.628, +4
8.70	2.313, +5	88.85	10.94	2379	2.102, +5	1114.41	73.84	4422	3.657, +4
8.80	2.340, +5	90.93	11.00	2422	2.127, +5	1145.89	74.46	4509	3.686, +4
8.90	2.366, +5	93.03	11.05	2466	2.152, +5	1177.82	75.07	4597	3.716, +4
9.00	2.393, +5	95.15	11.10	2511	2.178, +5	1210.19	75.68	4686	3.745, +4
9.10	2.420, +5	97.30	11.16	2555	2.203, +5	1243.01	76.27	4775	3.774, +4
9.20	2.446, +5	99.47	11.21	2601	2.228, +5	1276.27	76.86	4865	3.804, +4
9.30	2.473, +5	101.67	11.26	2646	2.253, +5	1309.87	77.45	4955	3.832, +4
9.40	2.499, +5	103.89	11.31	2692	2.278, +5	1344.03	78.02	5047	3.861, +4
9.50	2.526, +5	106.13	11.35	2739	2.304, +5	1378.64	78.59	5140	3.890, +4
9.60	2.553, +5	108.40	11.40	2786	2.329, +5	1413.69	79.14	5234	3.920, +4
9.70	2.579, +5	110.70	11.45	2833	2.354, +5	1449.19	79.70	5328	3.949, +4
9.80	2.606, +5	113.01	11.50	2881	2.379, +5	1485.14	80.24	5423	3.978, +4
9.90	2.632, +5	115.35	11.54	2929	2.404, +5	1521.53	80.78	5519	4.007, +4
10.00	2.659, +5	117.72	11.58	2977	2.429, +5	1558.38	81.32	5615	4.036, +4
10.10	2.686, +5	120.10	11.63	3026	2.455, +5	1595.70	81.84	5713	4.065, +4
10.20	2.712, +5	122.52	11.67	3076	2.480, +5	1633.31	82.40	5808	4.092, +4
10.30	2.739, +5	124.95	11.71	3125	2.505, +5	1671.58	82.89	5909	4.123, +4
10.40	2.765, +5	127.41	11.76	3176	2.530, +5				
10.50	2.792, +5	129.90	11.80	3226	2.555, +5				
10.60	2.818, +5	132.41	11.84	3277	2.580, +5				
10.70	2.845, +5	134.94	11.88	3329	2.606, +5				
10.80	2.872, +5	137.50	11.92	3381	2.631, +5				
10.90	2.898, +5	140.08	11.96	3433	2.656, +5				
11.00	2.925, +5	142.68	11.99	3485	2.681, +5				
11.10	2.951, +5	145.31	12.03	3539	2.706, +5				
11.20	2.978, +5	147.96	12.07	3592	2.731, +5				
11.30	3.005, +5	150.64	12.10	3646	2.756, +5				
11.40	3.031, +5	153.34	12.14	3701	2.782, +5				

NITROUS OXIDE

T1 297.0

INCIDENT SHOCK

H	U1	P21	P21	T2	U2
11.50	3.058, +5	156.07	12.19	3755	2.807, +5
11.60	3.084, +5	158.51	12.21	3811	2.832, +5
11.70	3.111, +5	161.59	12.24	3867	2.857, +5
11.80	3.138, +5	164.18	12.28	3923	2.882, +5
11.90	3.164, +5	167.21	12.31	3979	2.907, +5
12.00	3.191, +5	170.05	12.35	4036	2.932, +5
12.10	3.217, +5	172.92	12.38	4093	2.957, +5
12.20	3.244, +5	175.31	12.41	4151	2.983, +5
12.30	3.271, +5	178.73	12.44	4209	3.008, +5
12.40	3.297, +5	181.67	12.47	4267	3.033, +5
12.50	3.324, +5	184.64	12.51	4325	3.058, +5
12.60	3.350, +5	187.63	12.54	4385	3.083, +5
12.70	3.377, +5	190.64	12.57	4444	3.108, +5
12.80	3.403, +5	193.68	12.60	4501	3.133, +5
12.90	3.430, +5	196.75	12.63	4564	3.158, +5
13.00	3.457, +5	199.93	12.66	4625	3.184, +5
13.10	3.483, +5	202.94	12.69	4686	3.209, +5
13.20	3.510, +5	206.08	12.72	4749	3.234, +5
13.30	3.536, +5	209.24	12.75	4809	3.259, +5
13.40	3.563, +5	212.42	12.78	4872	3.284, +5
13.50	3.590, +5	215.63	12.80	4934	3.309, +5
13.60	3.616, +5	218.86	12.83	4997	3.334, +5
13.70	3.643, +5	222.12	12.86	5061	3.360, +5
13.80	3.669, +5	225.40	12.89	5124	3.385, +5
13.90	3.696, +5	228.70	12.92	5188	3.410, +5
14.00	3.723, +5	232.03	12.94	5253	3.435, +5
14.10	3.749, +5	235.38	12.97	5318	3.460, +5
14.20	3.776, +5	238.76	13.00	5383	3.485, +5
14.30	3.802, +5	242.16	13.02	5449	3.510, +5
14.40	3.829, +5	245.59	13.05	5514	3.535, +5
14.50	3.855, +5	249.04	13.08	5581	3.561, +5
14.60	3.882, +5	252.51	13.10	5647	3.586, +5
14.70	3.909, +5	256.01	13.13	5714	3.611, +5
14.80	3.935, +5	259.53	13.15	5782	3.636, +5
14.90	3.962, +5	263.08	13.18	5850	3.661, +5
15.00	3.988, +5	266.65	13.20	5918	3.686, +5

OXYGEN

T1 293.0

Table 5.8

INCIDENT SHOCK					REFLECTED SHOCK				
M	U1	P21	R21	T2	U2	P31	R31	T3	U3
1.10	3.588, +4	1.25	1.17	312	5.244, +3	1.54	1.37	331	3.162, +4
1.20	3.914, +4	1.52	1.35	330	1.005, +4	2.25	1.78	369	3.096, +4
1.30	4.240, +4	1.81	1.52	348	1.454, +4	3.12	2.25	407	3.056, +4
1.40	4.566, +4	2.13	1.70	367	1.879, +4	4.19	2.75	446	3.032, +4
1.50	4.892, +4	2.47	1.88	385	2.284, +4	5.45	3.29	485	3.022, +4
1.60	5.218, +4	2.83	2.05	405	2.674, +4	6.93	3.86	526	3.023, +4
1.70	5.545, +4	3.22	2.22	425	3.050, +4	8.64	4.46	568	3.031, +4
1.80	5.871, +4	3.63	2.39	445	3.416, +4	10.57	5.07	611	3.048, +4
1.90	6.197, +4	4.07	2.56	467	3.774, +4	12.75	5.70	655	3.069, +4
2.00	6.523, +4	4.53	2.72	489	4.124, +4	15.17	6.34	701	3.096, +4
2.10	6.849, +4	5.02	2.88	511	4.468, +4	17.84	6.99	748	3.126, +4
2.20	7.175, +4	5.53	3.03	535	4.807, +4	20.77	7.64	797	3.160, +4
2.30	7.501, +4	6.06	3.19	559	5.139, +4	23.94	8.28	847	3.197, +4
2.40	7.828, +4	6.62	3.32	585	5.470, +4	27.39	8.93	899	3.237, +4
2.50	8.154, +4	7.21	3.46	611	5.796, +4	31.11	9.57	952	3.279, +4
2.60	8.480, +4	7.82	3.59	638	6.119, +4	35.08	10.21	1007	3.322, +4
2.70	8.806, +4	8.45	3.72	665	6.440, +4	39.34	10.84	1063	3.368, +4
2.80	9.132, +4	9.11	3.85	693	6.759, +4	43.88	11.47	1121	3.415, +4
2.90	9.458, +4	9.79	3.97	722	7.076, +4	48.70	12.08	1181	3.464, +4
3.00	9.784, +4	10.50	4.09	752	7.392, +4	53.80	12.69	1242	3.515, +4
3.10	1.011, +5	11.23	4.20	783	7.705, +4	59.19	13.29	1305	3.566, +4
3.20	1.044, +5	11.99	4.31	815	8.017, +4	64.83	13.86	1370	3.620, +4
3.30	1.076, +5	12.77	4.42	847	8.327, +4	70.79	14.44	1437	3.674, +4
3.40	1.109, +5	13.56	4.52	880	8.637, +4	77.03	15.00	1505	3.728, +4
3.50	1.142, +5	14.41	4.62	914	8.946, +4	83.56	15.55	1574	3.784, +4
3.60	1.174, +5	15.27	4.72	948	9.253, +4	90.38	16.09	1646	3.840, +4
3.70	1.207, +5	16.15	4.81	983	9.560, +4	97.49	16.62	1719	3.897, +4
3.80	1.239, +5	17.06	4.90	1020	9.866, +4	104.88	17.14	1793	3.954, +4
3.90	1.272, +5	17.99	4.99	1056	1.017, +5	112.57	17.64	1869	4.012, +4
4.00	1.305, +5	18.95	5.08	1094	1.048, +5	120.54	18.14	1947	4.070, +4
4.10	1.337, +5	19.93	5.16	1132	1.078, +5	128.79	18.63	2025	4.126, +4
4.20	1.370, +5	20.94	5.24	1172	1.108, +5	137.34	19.11	2106	4.185, +4
4.30	1.402, +5	21.97	5.31	1212	1.139, +5	146.17	19.57	2188	4.243, +4
4.40	1.435, +5	23.03	5.39	1253	1.169, +5	155.22	20.02	2272	4.303, +4
4.50	1.468, +5	24.11	5.46	1294	1.199, +5	164.62	20.46	2357	4.361, +4
4.60	1.500, +5	25.22	5.53	1337	1.229, +5	174.31	20.90	2444	4.419, +4
4.70	1.533, +5	26.35	5.60	1380	1.259, +5	184.27	21.33	2532	4.478, +4
4.80	1.566, +5	27.51	5.66	1424	1.289, +5	194.53	21.75	2621	4.536, +4
4.90	1.598, +5	28.69	5.72	1468	1.319, +5	205.07	22.16	2712	4.594, +4
5.00	1.631, +5	29.89	5.79	1514	1.349, +5	215.89	22.56	2804	4.652, +4
5.10	1.663, +5	31.13	5.85	1560	1.379, +5	227.00	22.96	2897	4.710, +4
5.20	1.696, +5	32.38	5.90	1607	1.409, +5	238.40	23.35	2992	4.768, +4
5.30	1.729, +5	33.67	5.96	1655	1.439, +5	250.08	23.73	3088	4.826, +4
5.40	1.761, +5	34.97	6.02	1703	1.468, +5	262.05	24.11	3185	4.883, +4
5.50	1.794, +5	36.30	6.07	1752	1.498, +5	274.31	24.48	3284	4.941, +4
5.60	1.826, +5	37.66	6.12	1802	1.528, +5	286.86	24.84	3384	4.998, +4
5.70	1.859, +5	39.04	6.17	1853	1.558, +5	299.71	25.20	3485	5.055, +4
5.80	1.892, +5	40.45	6.22	1905	1.588, +5	312.84	25.55	3588	5.112, +4
5.90	1.924, +5	41.88	6.27	1957	1.617, +5	326.28	25.90	3692	5.169, +4
6.00	1.957, +5	43.34	6.32	2010	1.647, +5	340.01	26.24	3797	5.226, +4
6.10	1.990, +5	44.82	6.37	2063	1.677, +5	354.03	26.57	3904	5.283, +4
6.20	2.022, +5	46.33	6.41	2118	1.707, +5	368.36	26.90	4012	5.339, +4

## OXYGEN


T1 293.0

## INCIDENT SHOCK

## REFLECTED SHOCK

M	U1	P21	R21	T2	U2	P31	R31	T3	U3
6.30	2.055, +5	47.87	6.46	2173	1.736, +5	382.99	27.23	4121	5.396, +4
6.40	2.087, +5	49.43	6.50	2278	1.766, +5	397.93	27.55	4232	5.453, +4
6.50	2.120, +5	51.01	6.54	2285	1.796, +5	413.17	27.87	4344	5.509, +4
6.60	2.153, +5	52.62	6.58	2342	1.826, +5	428.72	28.18	4458	5.566, +4
6.70	2.185, +5	54.26	6.62	2400	1.855, +5	444.56	28.49	4572	5.622, +4
6.80	2.218, +5	55.92	6.66	2458	1.885, +5	460.73	28.79	4689	5.679, +4
6.90	2.250, +5	57.60	6.70	2517	1.915, +5	477.22	29.09	4807	5.736, +4
7.00	2.283, +5	59.31	6.74	2577	1.944, +5	494.03	29.38	4927	5.793, +4
7.10	2.316, +5	61.05	6.78	2638	1.974, +5				
7.20	2.348, +5	62.81	6.82	2699	2.004, +5				
7.30	2.381, +5	64.60	6.86	2761	2.034, +5				
7.40	2.414, +5	66.42	6.89	2823	2.063, +5				
7.50	2.446, +5	68.25	6.93	2886	2.093, +5				
7.60	2.479, +5	70.12	6.96	2950	2.123, +5				
7.70	2.511, +5	72.01	7.00	3014	2.153, +5				
7.80	2.544, +5	73.93	7.03	3079	2.182, +5				
7.90	2.577, +5	75.87	7.07	3145	2.212, +5				
8.00	2.609, +5	77.83	7.10	3211	2.242, +5				
8.10	2.642, +5	79.83	7.14	3278	2.272, +5				
8.20	2.674, +5	81.85	7.17	3346	2.301, +5				
8.30	2.707, +5	83.89	7.20	3414	2.331, +5				
8.40	2.740, +5	85.96	7.23	3483	2.361, +5				
8.50	2.772, +5	88.05	7.26	3552	2.391, +5				
8.60	2.805, +5	90.17	7.29	3622	2.420, +5				
8.70	2.837, +5	92.32	7.32	3693	2.450, +5				
8.80	2.870, +5	94.49	7.35	3765	2.480, +5				
8.90	2.903, +5	96.69	7.38	3837	2.510, +5				
9.00	2.935, +5	98.91	7.41	3910	2.539, +5				
9.10	2.968, +5	101.16	7.44	3983	2.569, +5				
9.20	3.001, +5	103.43	7.47	4057	2.599, +5				
9.30	3.033, +5	105.73	7.50	4132	2.629, +5				
9.40	3.066, +5	108.06	7.53	4207	2.658, +5				
9.50	3.098, +5	110.41	7.55	4283	2.688, +5				
9.60	3.131, +5	112.78	7.58	4360	2.718, +5				
9.70	3.164, +5	115.18	7.61	4437	2.748, +5				
9.80	3.196, +5	117.62	7.63	4514	2.778, +5				
9.90	3.229, +5	120.07	7.66	4593	2.807, +5				
10.00	3.261, +5	122.54	7.68	4673	2.837, +5				
10.10	3.294, +5	125.05	7.71	4753	2.867, +5				
10.20	3.327, +5	127.58	7.73	4833	2.897, +5				
10.30	3.359, +5	130.13	7.76	4914	2.926, +5				
10.40	3.392, +5	132.71	7.78	4998	2.956, +5				

FIG 1

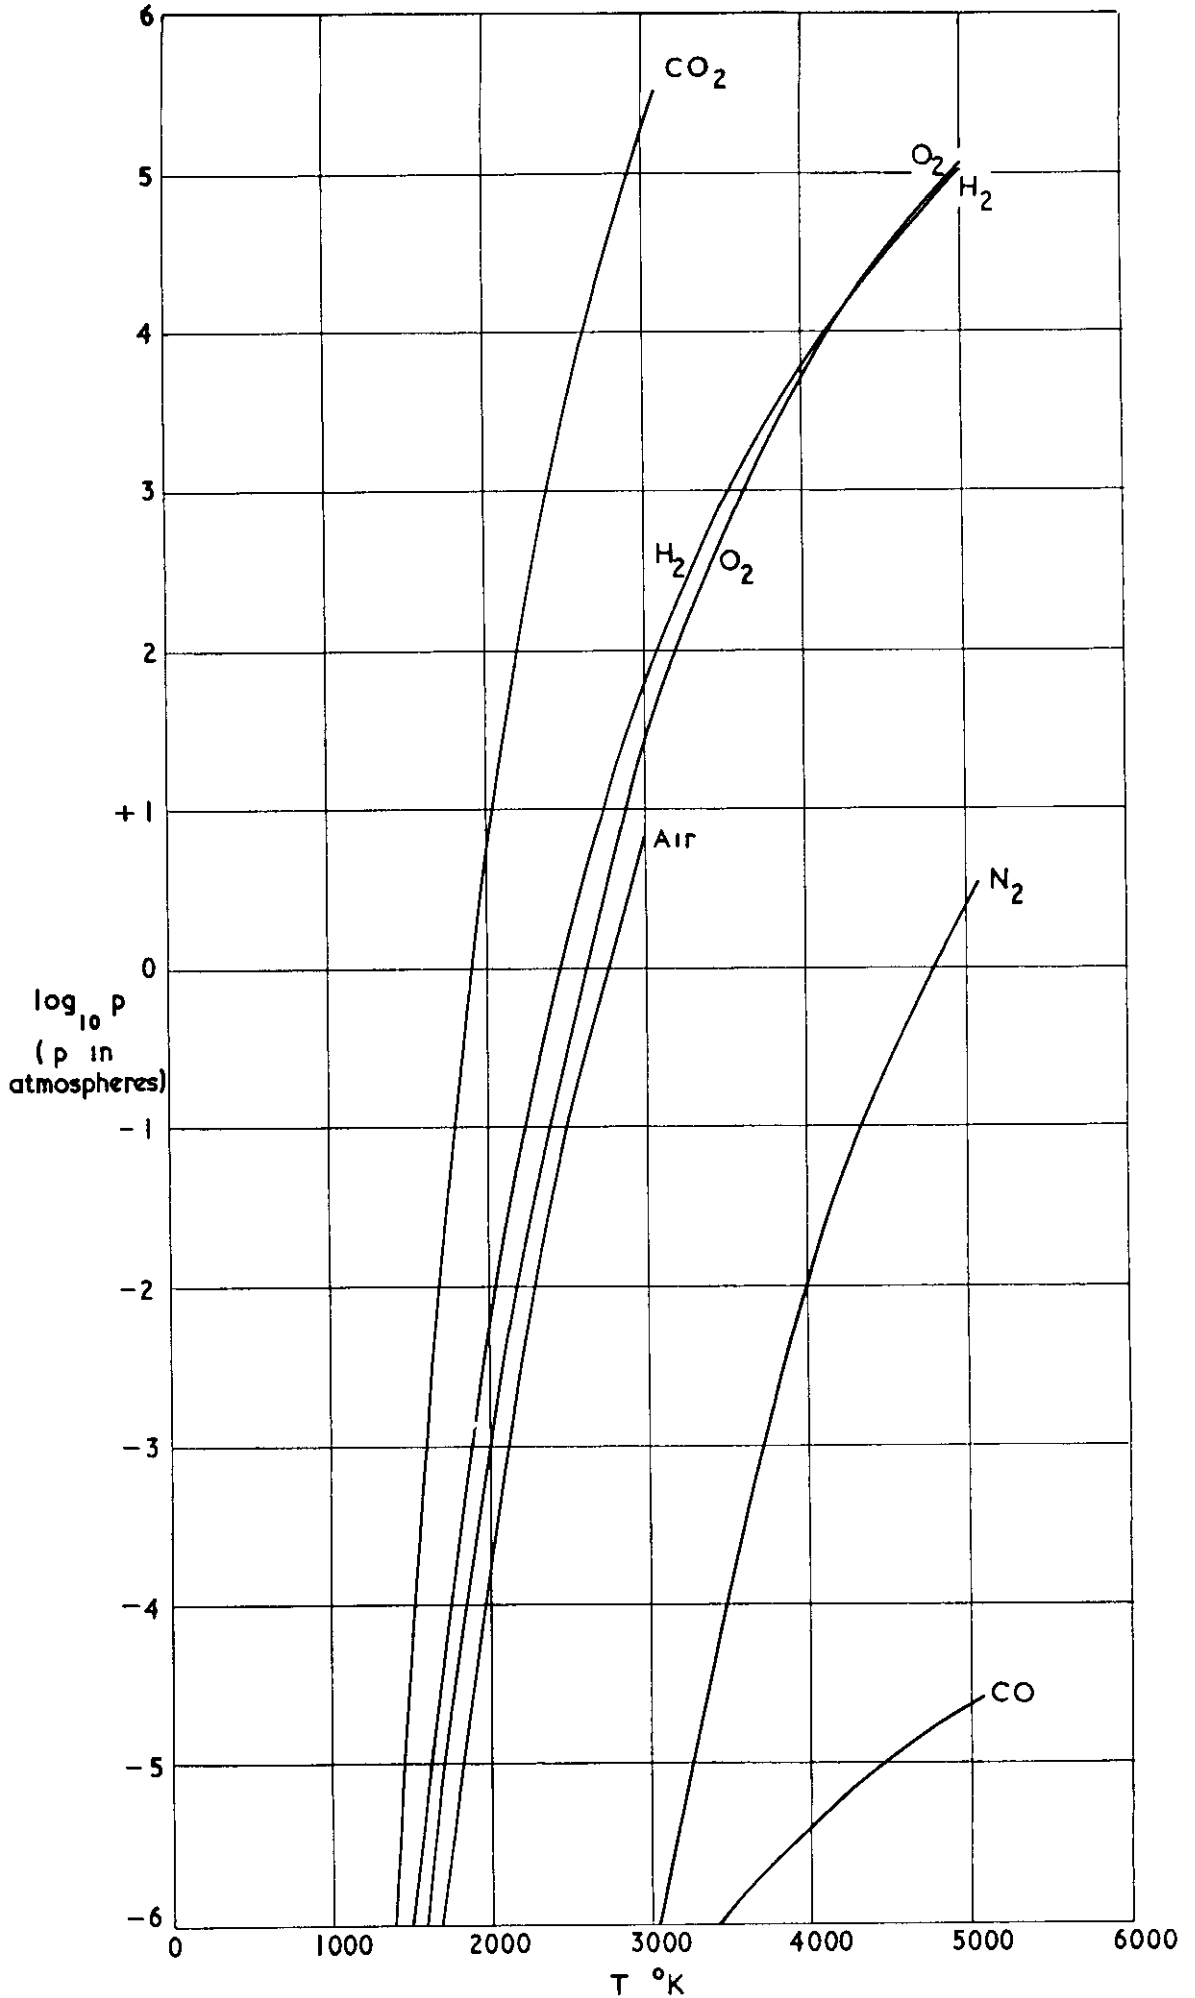

Boundaries for 1 per cent increase in compressibility





ARC C.P.No.1101  
June, 1969.  
Lapworth, K. C.

NORMAL SHOCK-WAVE TABLES FOR AIR, ARGON, CARBON DIOXIDE,  
CARBON MONOXIDE, HYDROGEN, NITROGEN, NITROUS  
OXIDE AND OXYGEN

A method for calculating equilibrium conditions behind incident and reflected shock waves in a shock tube is briefly outlined. Tables are presented giving conditions of pressure, density and temperature behind the incident and reflected shock wave for various incident shock speeds. In addition, the tables give the speed of the gas behind the incident shock wave and the speed of the reflected shock wave.

ARC C.P.No.1101  
June, 1969.  
Lapworth, K. C.

NORMAL SHOCK-WAVE TABLES FOR AIR, ARGON, CARBON DIOXIDE,  
CARBON MONOXIDE, HYDROGEN, NITROGEN, NITROUS  
OXIDE AND OXYGEN


A method for calculating equilibrium conditions behind incident and reflected shock waves in a shock tube is briefly outlined. Tables are presented giving conditions of pressure, density and temperature behind the incident and reflected shock wave for various incident shock speeds. In addition, the tables give the speed of the gas behind the incident shock wave and the speed of the reflected shock wave.

ARC C.P.No.1101  
June, 1969.  
Lapworth, K. C.

NORMAL SHOCK-WAVE TABLES FOR AIR, ARGON, CARBON DIOXIDE,  
CARBON MONOXIDE, HYDROGEN, NITROGEN, NITROUS  
OXIDE AND OXYGEN

A method for calculating equilibrium conditions behind incident and reflected shock waves in a shock tube is briefly outlined. Tables are presented giving conditions of pressure, density and temperature behind the incident and reflected shock wave for various incident shock speeds. In addition, the tables give the speed of the gas behind the incident shock wave and the speed of the reflected shock wave.





© *Crown copyright 1970*

Printed and published by  
HER MAJESTY'S STATIONERY OFFICE

To be purchased from  
49 High Holborn, London WC1  
13a Castle Street, Edinburgh EH2 3AR  
109 St Mary Street, Cardiff CF1 1JW  
Brazenose Street, Manchester M60 8AS  
50 Fairfax Street, Bristol BS1 3DE  
258 Broad Street, Birmingham 1  
7 Linenhall Street, Belfast BT2 8AY  
or through any bookseller

*Printed in England*